




CATTLE SLATTED FLOOR PASSABLE

www.thye-lokenberg.com 

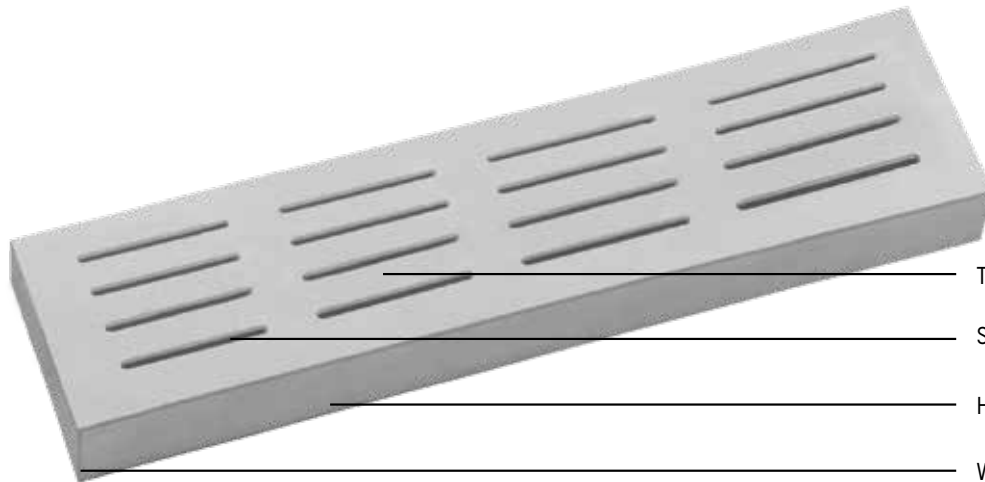

Tread area: 18.5 cm

Slot width: 3.5/3.9 cm

Height: 16, 18, 20 cm

Width: 110 cm

- ▶ Animal weight: up to 850 kg or passable with 4 tons, 10 tons or 15 tons axle load
- ▶ Can be combined with other slat floors and closed elements (same height)
- ▶ Surface with broom finish
- ▶ Bearing: 12 cm
- ▶ Load class: A2/A3
- ▶ Concrete quality: C 40/50
- ▶ Standardly deburred slot edges
- ▶ Manufactures according to the requirements of DIN EN 12737



thye-lokenberg

The cattle slatted floor, type RB, is characterized by a high loadability.

Due to the low height of 16 cm, the type RB can also be combined with other slatted floor types.

On request, it is also possible to produce the height of 18 cm and 20 cm.


Despite the loadability of type RB, a good self-cleaning is ensured by longitudinal slot arrangement with excrement tear-off edge.

The cattle slatted floor type RB is ideal for the covering of liquid manure channels on navigable feeding tables. However, the use in all stable areas requiring a high loadability is also possible.

SIZES

Length in m	Weight in kg/piece	Weight in kg/m ²
2.00	539	245
2.10	565	245
2.20	593	245
2.30	620	245
2.40	647	245
2.50	674	245
2.60	701	245
2.70	728	245
2.80	755	245
2.90	782	245
3.00	809	245
3.10	836	245
3.20	863	245
3.30	890	245
3.40	917	245
3.50	944	245
3.60	970	245
3.70	997	245
3.80	1024	245
3.90	1051	245
4.00	1078	245

This slatted floor has already established itself on the Dutch market in the slot width of 3.9 cm.

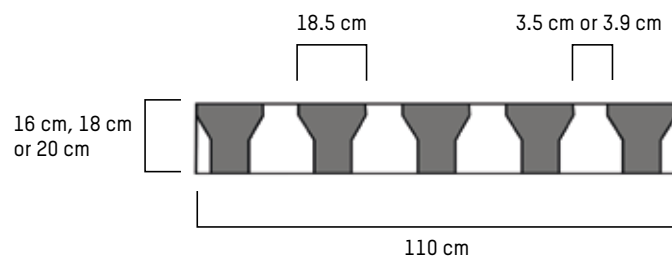

Other lengths on request

The illustrations may differ from the actual version.
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Deutschland GmbH
Erlenweg 4
49434 Neuenkirchen-Vörden

Fon: +49 5493 99219-0
Fax: +49 5493 1822
E-Mail: info@thye-lokenberg.de

Thye-Lokenberg Polska sp.z.o.o.
ul. Osiedlowa 27
PL 68-114 Tomaszowo

Fon: +48 68 3606-199
Fax: +48 68 3606-299
E-Mail: thye@thye-lokenberg.pl